

LIQUID CRYSTAL DISPLAY MODULE

Product Specification

CUSTOMER	Standard	
PRODUCT NUMBER	TSR40823	
CUSTOMER APPROVAL		Date

INTERNAL APPROVALS		
Product Mgr	Doc. Control	Electr. Eng
Bruno Recaldini	Anthony Perkins	Bazile Peter
Date: 21 Jun. 06	Date: 18 Jun 06	Date:18 Jun 06

- Approval for Specification only
- Approval for Specification and Sample

TABLE OF CONTENTS

1	MAIN FEATURES	4
2	MECHANICAL SPECIFICATION.....	5
2.1	MECHANICAL CHARACTERISTICS	5
2.2	LABELLING & MARKING.....	5
2.3	MECHANICAL DRAWING	6
3	ELECTRICAL SPECIFICATION.....	7
3.1	ABSOLUTE MAXIMUM RATINGS	7
3.2	ELECTRICAL CHARACTERISTICS	8
3.3	INTERFACE PIN ASSIGNMENT	9
3.4	PIXEL ARRANGEMENT – STRIPE	15
3.5	BLOCK DIAGRAM	15
3.6	COLOUR DATA INPUT ASSIGNMENT	16
3.7	TIMING CHARACTERISTICS	17
3.8	POWER ON SEQUENCE.....	20
4	OPTICAL SPECIFICATION.....	21
4.1	OPTICAL CHARACTERISTICS.....	21
5	TOUCH PANEL CHARACTERISTICS.....	23
5.1	PIN ASSIGNMENT	23
5.2	ELECTRICAL CHARACTERISTICS.....	23
5.3	DURABILITY PERFORMANCE	23
6	BACKLIGHT SPECIFICATION	24
6.1	BACKLIGHT CHARACTERISTICS.....	24
6.2	INTERNAL CIRCUIT DIAGRAM	24
6.3	LED BACKLIGHT APPLICATION NOTE.....	25
7	QUALITY ASSURANCE SPECIFICATION.....	26
7.1	CONFORMITY	26
7.2	DELIVERY ASSURANCE	26
7.3	DEALING WITH CUSTOMER COMPLAINTS	31
8	RELIABILITY SPECIFICATION	32
8.1	RELIABILITY TESTS	32
8.2	LIFE TIME.....	33
9	PART NUMBER DESCRIPTIONS FOR AVAILABLE OPTIONS.....	34
10	HANDLING PRECAUTIONS.....	35

Product No.	TSR40823	REV. A

Page	2 / 35
------	--------

REVISION RECORD

Rev.	Date	Page	Chapt.	Comment	ECR no.
A	12 June 06			Production Release	

Product No.	TSR40823	REV. A

Page	3 / 35
------	--------

1 MAIN FEATURES

ITEM	CONTENTS
Screen Size	3.5" (diagonal)
Display Format	640x(RGB)x480 dots
Colours	262,144
Overall Dimensions	84.25(W) x 65.40(H) x 4.45(D) (Typ) mm
Viewing Area	75.2(W) x 55.56(H) mm
LCD type	TFT a-Si
Pixel Configuration	Stripe
Mode	Transmissive
Viewing Angle	6 o'clock
Backlight type	LED, White
Surface treatment	AG
Touch Panel surface Treatment	3H
Interface	TTL 18-bit
Operating temperature	-20 to +70 °C
Storage temperature	-20 to +70 °C

Product No.	TSR40823	REV. A

Page	4 / 35
------	--------

2 MECHANICAL SPECIFICATION

2.1 MECHANICAL CHARACTERISTICS

ITEM	CHARACTERISTIC	UNIT
Screen Size	3.5 (diagonal)	inch
Display Format	640x(RGB)x480	dot
Overall Dimensions	84.25(W) x 65.40(H) x 4.45(D) (Typ)	mm
Viewing Area	75.2(W) x 55.56(H)	mm
Active Area	72(W) x 52.56(H)	mm
Dot Pitch	0.1125(W) x 0.1095(H)	mm
Weight	40 ±5 (Typ)	g

2.2 LABELLING & MARKING

DENSITRON TSR40823 TW YYMM

Product No.	TSR40823	REV. A

Page	5 / 35
------	--------

3 ELECTRICAL SPECIFICATION

3.1 ABSOLUTE MAXIMUM RATINGS

VSS = 0 V, Ta = 25 °C

Item	Symbol	Min	Max	Unit	Note
Supply Voltage	V _{DD1}	-0.3	2	V	
	V _{CC}	-0.3	5		
	V _{DD2}	-0.5	12		
	V _{GG}	-0.3	40		
	V _{GG} V _{EE}	-0.3	40		
	V _{EE}	-20	0.3		
Operating Temperature	Top	-20	70	°C	Note 1
Storage Temperature	Tst	-20	70	°C	Note 2
Static Electricity	Be sure that you are grounded when handling displays.				

Note 1: Background colour changes slightly depending on ambient temperature. This phenomenon is reversible. Ta ≤ 70 °C: 75% RH max

Note 2: Ta ≤ 70 °C: 75% RH max

Product No.	TSR40823	REV. A

Page	7 / 35
------	--------

3.2 ELECTRICAL CHARACTERISTICS

VSS = 0 V, Ta = 25 °C

Item	Symbol	Condition	Min	Typ	Max	Unit
Source Driver Supply Voltage	V _{DD1}	Ta = 25 °C	3.0	3.3	3.6	V
	V _{DD2}		9.5	10.0	10.5	
Gate Driver Supply Voltage	V _{GG}	Ta = 25 °C	-	17.0	-	V
	V _{EE}		-	-10.0	-	
	V _{CC}		3.0	3.3	3.6	
Input Voltage	V _{IL}	Ta = 25 °C	0	-	0.2 V _{DD1}	V
	V _{IH}	Ta = 25 °C	0.8 V _{DD1}	-	V _{DD1}	V
Gate Driver Supply Current (HI level)	I _{GG}	V _{GG} = 17.0V	-	0.12	0.15	mA
Gate Driver Supply Current (LOW level)	I _{EE}	V _{EE} = -10.0V	-	0.15	0.19	mA
Source Driver Supply Current (digital)	I _{DD1}	V _{DD1} = 3.3V	-	4.8	8.0	mA
Source Driver Supply Current (analogue)	I _{DD2}	V _{DD2} = 10.0V	-	16.0	30.0	mA
Gate Driver Supply Current (digital)	I _{CC}	V _{CC} = 3.3V	-	0.17	0.21	mA
LCD Panel Power Consumption	P _{LCD}		-	180	332	mW
Backlight Power Consumption	P _{LED}		-	384	456	mW
Total Power Consumption	P _{TOT}		-	564	788	mW

Product No.	TSR40823	REV. A

Page	8 / 35
------	--------

3.3 INTERFACE PIN ASSIGNMENT

No.	Symbol	I/O	Function	Note
1	DIO1	I/O	Horizontal Start Pulse Signal Input or Output 1	Note 1
2	VSS2	I	Ground	
3	VDD1	I	Power Supply	
4	CLK	I	Horizontal Shift Clock	
5	R/L	I	Left/Right Selection	Note 1
6	R0	I	Red Data (LSB)	
7	R1	I	Red Data	
8	R2	I	Red Data	
9	R3	I	Red Data	
10	R4	I	Red Data	
11	R5	I	Red Data (MSB)	
12	VSS2	I	Ground	
13	G0	I	Green Data (LSB)	
14	G1	I	Green Data	
15	G2	I	Green Data	
16	G3	I	Green Data	
17	G4	I	Green Data	
18	G5	I	Green Data (MSB)	
19	B0	I	Blue Data (LSB)	
20	B1	I	Blue Data	
21	B2	I	Blue Data	
22	B3	I	Blue Data	
23	B4	I	Blue Data	
24	B5	I	Blue Data (MSB)	
25	LD	I	Load output signal	Note 2

Product No.	TSR40823	REV. A

Page	9 / 35
------	--------

INTERFACE PIN ASSIGNMENT CONTINUED

No.	Symbol	I/O	Function	Note
26	REV	I	Data invert control	Note 3
27	POL	I	Polarity selection	Note 4
28	DIO2	I/O	Horizontal Start Pulse Signal Input or Output	Note 1
29	VSS2	I	Ground	
30	V3	I	Gamma Voltage 3	Note 5
31	V5	I	Gamma Voltage 5	Note 5
32	V7	I	Gamma Voltage 7	Note 5
33	V8	I	Gamma Voltage 8	Note 5
34	V10	I	Gamma Voltage 10	Note 5
35	V12	I	Gamma Voltage 12	Note 5
36	VSS2	I	Ground	
37	VDD2	I	Voltage for analogue circuit	Note 5
38	VCOM	I	Common Voltage	
39	OE	I	Output Enable	Note 6
40	U/D	I	Up/Down Selection	Note 7
41	CKV	I	Vertical Shift Clock	Note 8
42	STVU	I/O	Vertical Shift Pulse Signal Input or Output	Note 7
43	STVD	I/O	Vertical Shift Pulse Signal Input or Output	Note 7
44	VGG	I	Gate On Voltage	Note 9
45	VSS1	I	Ground	
46	VCC	I	Voltage for logic circuit	
47	VEE	I	Gate Off Voltage	Note 10
48	VLED	-	Supply voltage for LED backlight	Note 11
49	GLED2	-	Ground for LED backlight	
50	GLED1	-	Ground for LED backlight	

Note 1: Select left or right shift

R/L	DIO1	DIO2	Shift
1	Input	Hi-Z	Left to right
0	Hi-Z	Input	Right to left

Product No.	TSR40823	REV. A

Page	10 / 35
------	---------

Note 2: Latch the polarity of outputs and switch the new data to outputs. At the rising edge (LD), latch the “POL” signal to control the polarity of the outputs.

Note 3: Control whether the Data R0~G5 are inverted or not (we suggests connecting to GND). When “REV=1”, these data will be inverted. EX: “00”→”3F”, “07” →”38”, “15” →”2A”


Note 4: Polarity selector for dot-inversion control. Available at the rising edge of LD. When POL=1: Even outputs range from V1~V7, and Odd outputs range from V8~V14; When POL=0: Even outputs range from V8~V14, and Odd outputs range from V1~V7.

Note 5:

1) Relationship between input data and output voltage

The figure below shows the relationship between the input data (x axis) and the output voltage with the polarity(y axis).

The range of V1~V7 is for positive polarity, and V8~V14 for negative polarity. Please refer to the following pages to get the related resister values and voltage calculation method.

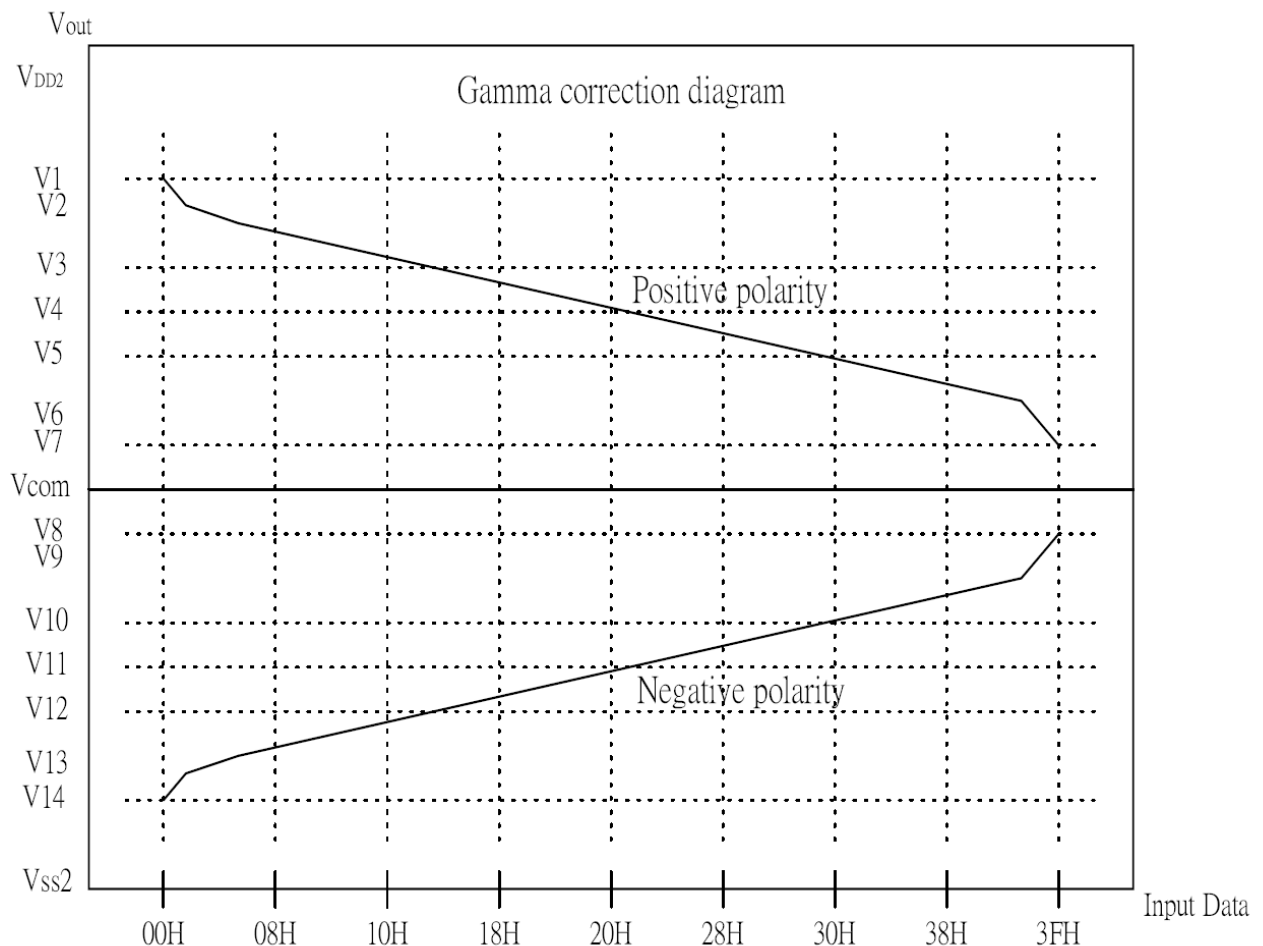

Product No.	TSR40823	REV. A

Page	11 / 35
------	---------

3.3.1 Output Voltage and Input Data

Data	Positive polarity Output Voltage	Negative polarity Output Voltage
00H	V1	V14
01H	$V2=V3+(V1-V3) \times 58 / 64.4$	$V13=V14+(V12-V14) \times 6.4 / 64.4$
02H	$V3+(V1-V3) \times 52 / 64.4$	$V14+(V12-V14) \times 12.4 / 64.4$
03H	$V3+(V1-V3) \times 46.4 / 64.4$	$V14+(V12-V14) \times 18 / 64.4$
04H	$V3+(V1-V3) \times 41.2 / 64.4$	$V14+(V12-V14) \times 23.2 / 64.4$
05H	$V3+(V1-V3) \times 36.4 / 64.4$	$V14+(V12-V14) \times 28 / 64.4$
06H	$V3+(V1-V3) \times 32 / 64.4$	$V14+(V12-V14) \times 32.4 / 64.4$
07H	$V3+(V1-V3) \times 27.6 / 64.4$	$V14+(V12-V14) \times 36.8 / 64.4$
08H	$V3+(V1-V3) \times 23.6 / 64.4$	$V14+(V12-V14) \times 40.8 / 64.4$
09H	$V3+(V1-V3) \times 19.6 / 64.4$	$V14+(V12-V14) \times 44.8 / 64.4$
0AH	$V3+(V1-V3) \times 16.4 / 64.4$	$V14+(V12-V14) \times 48 / 64.4$
0BH	$V3+(V1-V3) \times 13.2 / 64.4$	$V14+(V12-V14) \times 51.2 / 64.4$
0CH	$V3+(V1-V3) \times 10.4 / 64.4$	$V14+(V12-V14) \times 54 / 64.4$
0DH	$V3+(V1-V3) \times 7.6 / 64.4$	$V14+(V12-V14) \times 56.8 / 64.4$
0EH	$V3+(V1-V3) \times 4.8 / 64.4$	$V14+(V12-V14) \times 59.6 / 64.4$
0FH	$V3+(V1-V3) \times 2.4 / 64.4$	$V14+(V12-V14) \times 62 / 64.4$
10H	V3	V12
11H	$V4+(V3-V4) \times 19.6 / 22$	$V12+(V11-V12) \times 2.4 / 22$
12H	$V4+(V3-V4) \times 17.6 / 22$	$V12+(V11-V12) \times 4.4 / 22$
13H	$V4+(V3-V4) \times 15.6 / 22$	$V12+(V11-V12) \times 6.4 / 22$
14H	$V4+(V3-V4) \times 13.6 / 22$	$V12+(V11-V12) \times 8.4 / 22$
15H	$V4+(V3-V4) \times 12 / 22$	$V12+(V11-V12) \times 10 / 22$
16H	$V4+(V3-V4) \times 10.4 / 22$	$V12+(V11-V12) \times 11.6 / 22$
17H	$V4+(V3-V4) \times 8.8 / 22$	$V12+(V11-V12) \times 13.2 / 22$
18H	$V4+(V3-V4) \times 7.6 / 22$	$V12+(V11-V12) \times 14.4 / 22$
19H	$V4+(V3-V4) \times 6.4 / 22$	$V12+(V11-V12) \times 15.6 / 22$
1AH	$V4+(V3-V4) \times 5.2 / 22$	$V12+(V11-V12) \times 16.8 / 22$
1BH	$V4+(V3-V4) \times 4 / 22$	$V12+(V11-V12) \times 18 / 22$
1CH	$V4+(V3-V4) \times 3.2 / 22$	$V12+(V11-V12) \times 18.8 / 22$
1DH	$V4+(V3-V4) \times 2.4 / 22$	$V12+(V11-V12) \times 19.6 / 22$
1EH	$V4+(V3-V4) \times 1.6 / 22$	$V12+(V11-V12) \times 20.4 / 22$
1FH	$V4+(V3-V4) \times 0.8 / 22$	$V12+(V11-V12) \times 21.2 / 22$

Product No.	TSR40823	REV. A	Page	12 / 35


OUTPUT VOLTAGE and INPUT DATA CONTINUED

Data	Positive polarity Output Voltage	Negative polarity Output Voltage
20H	V4	V11
21H	$V5+(V4-V5) \times 12 / 12.8$	$V11+(V10-V11) \times 0.8 / 12.8$
22H	$V5+(V4-V5) \times 11.2 / 12.8$	$V11+(V10-V11) \times 1.6 / 12.8$
23H	$V5+(V4-V5) \times 10.4 / 12.8$	$V11+(V10-V11) \times 2.4 / 12.8$
24H	$V5+(V4-V5) \times 9.6 / 12.8$	$V11+(V10-V11) \times 3.2 / 12.8$
25H	$V5+(V4-V5) \times 8.8 / 12.8$	$V11+(V10-V11) \times 4 / 12.8$
26H	$V5+(V4-V5) \times 8 / 12.8$	$V11+(V10-V11) \times 4.8 / 12.8$
27H	$V5+(V4-V5) \times 7.2 / 12.8$	$V11+(V10-V11) \times 5.6 / 12.8$
28H	$V5+(V4-V5) \times 6.4 / 12.8$	$V11+(V10-V11) \times 6.4 / 12.8$
29H	$V5+(V4-V5) \times 5.6 / 12.8$	$V11+(V10-V11) \times 7.2 / 12.8$
2AH	$V5+(V4-V5) \times 4.8 / 12.8$	$V11+(V10-V11) \times 8 / 12.8$
2BH	$V5+(V4-V5) \times 4 / 12.8$	$V11+(V10-V11) \times 8.8 / 12.8$
2CH	$V5+(V4-V5) \times 3.2 / 12.8$	$V11+(V10-V11) \times 9.6 / 12.8$
2DH	$V5+(V4-V5) \times 2.4 / 12.8$	$V11+(V10-V11) \times 10.4 / 12.8$
2EH	$V5+(V4-V5) \times 1.6 / 12.8$	$V11+(V10-V11) \times 11.2 / 12.8$
2FH	$V5+(V4-V5) \times 0.8 / 12.8$	$V11+(V10-V11) \times 12 / 12.8$
30H	V5	V10
31H	$V7+(V5-V7) \times 26.8 / 27.6$	$V10+(V8-V10) \times 0.8 / 27.6$
32H	$V7+(V5-V7) \times 26 / 27.6$	$V10+(V8-V10) \times 1.6 / 27.6$
33H	$V7+(V5-V7) \times 25.2 / 27.6$	$V10+(V8-V10) \times 2.4 / 27.6$
34H	$V7+(V5-V7) \times 24.4 / 27.6$	$V10+(V8-V10) \times 3.2 / 27.6$
35H	$V7+(V5-V7) \times 23.6 / 27.6$	$V10+(V8-V10) \times 4 / 27.6$
36H	$V7+(V5-V7) \times 22.4 / 27.6$	$V10+(V8-V10) \times 5.2 / 27.6$
37H	$V7+(V5-V7) \times 21.2 / 27.6$	$V10+(V8-V10) \times 6.4 / 27.6$
38H	$V7+(V5-V7) \times 20 / 27.6$	$V10+(V8-V10) \times 7.6 / 27.6$
39H	$V7+(V5-V7) \times 18.4 / 27.6$	$V10+(V8-V10) \times 9.2 / 27.6$
3AH	$V7+(V5-V7) \times 16.8 / 27.6$	$V10+(V8-V10) \times 10.8 / 27.6$
3BH	$V7+(V5-V7) \times 14.8 / 27.6$	$V10+(V8-V10) \times 12.8 / 27.6$
3CH	$V7+(V5-V7) \times 12.8 / 27.6$	$V10+(V8-V10) \times 14.8 / 27.6$
3DH	$V7+(V5-V7) \times 10.4 / 27.6$	$V10+(V8-V10) \times 17.2 / 27.6$
3EH	$V7+(V5-V7) \times 6.4 / 27.6$	$V10+(V8-V10) \times 21.2 / 27.6$
3FH	V7	V8

Product No.	TSR40823	REV. A

Page	13 / 35
------	---------

3.3.2 Typical Application Circuit

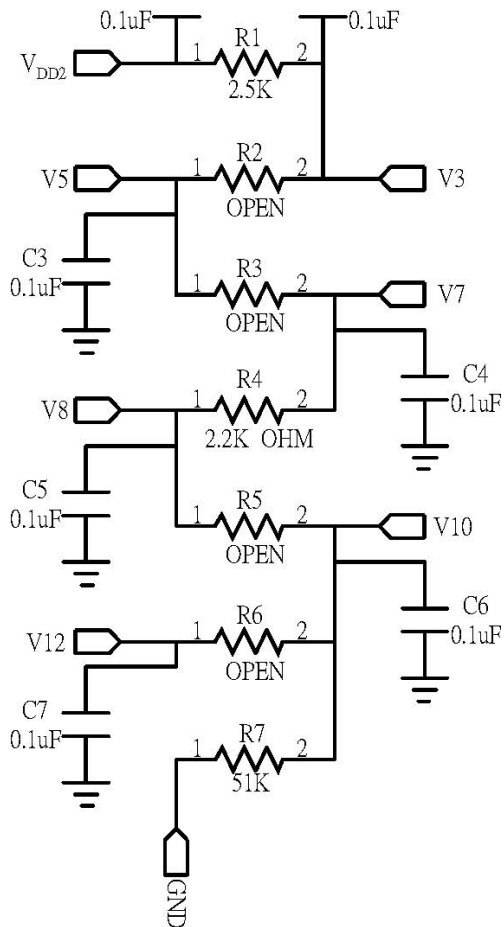

Note 6: When OE is connected to high “1”, the driver outputs are disabled (Gate output = V_{EE}). Under this condition, the operation of registers will not be affected.

Note 7: Select up or down shift:

U/D	STVU	STVD	Shift
1	Hi-Z	Input	Down to Up
0	Input	Hi-Z	Up to Down

Note 8: Gate driver shift clock

Note 9: Gate on voltage, $V_{GG} = +17V$.


Note 10: Gate off voltage, $V_{EE} = -10V$.

Note 11: $I_{LED} = 20mA$.typ


Product No.	TSR40823	REV. A

Page	14 / 35
------	---------

3.4 PIXEL ARRANGEMENT – STRIPE

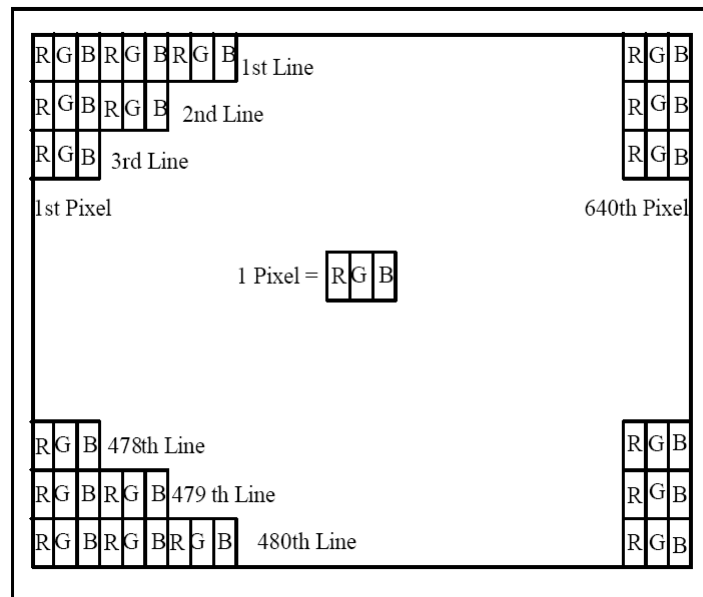

3.5 BLOCK DIAGRAM

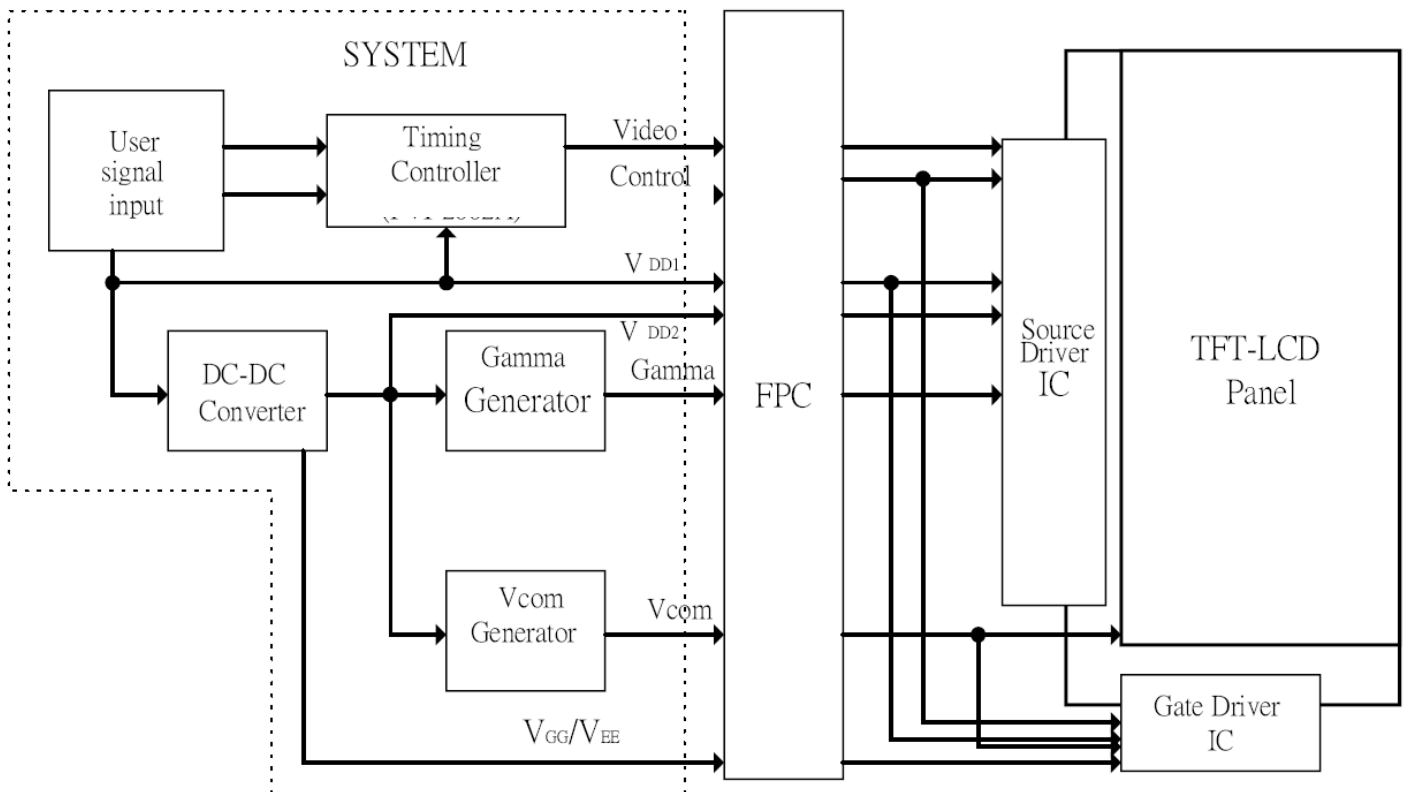

Product No.	TSR40823	REV. A

Page	15 / 35
------	---------

3.6 COLOUR DATA INPUT ASSIGNMENT

Colour		Input Colour Data																	
		Red						Green						Blue					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Colours	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Red(00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red(01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	
	Red(02)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	
	Darker																		
	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
	Brighter																		
	Red(61)	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	
	Red(62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	
Red(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0		
Green	Green (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green (01)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	
	Green (02)	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	
	Darker																		
	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
	Brighter																		
	Green (61)	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	
	Green (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	
Green (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0		
Blue	Blue (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Blue (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	Blue (02)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	
	Darker																		
	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	
	Brighter																		
	Blue (61)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	
	Blue (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	
Blue (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1		

Product No.	TSR40823	REV. A

Page	16 / 35
------	---------

3.7 TIMING CHARACTERISTICS

3.7.1 AC Electrical Characteristics


$V_{CC} = V_{DD1} = 3.3V$, $V_{DD2} = 10.0V$, $GND = V_{SS1} = V_{SS2} = 0V$; $T_a = 25^{\circ}C$

Parameter	Symbol	Min.	Typ.	Max.	Unit
CLK Frequency	Fclk	-	25	40	MHz
CLK Pulse Width	T _{CPH}	25	-	-	ns
Data Set-up Time	T _{su}	4	-	-	ns
Data Hold Time	T _{hd}	2	-	-	ns
Propagation Delay of DIO2/1	T _{phl}	6	10	15	ns
Time That The Last Data to LD	T _{ld}	1	-	-	T _{CPH}
Pulse width of LD	T _{wld}	2	-	-	T _{CPH}
Time That LD to DIO1/2	T _{lds}	5	-	-	T _{CPH}
POL Set-up Time	T _{psu}	6	-	-	ns
POL Hold Time	T _{phd}	6	-	-	ns
OE Pulse Width	T _{oEV}	1	-	-	s
CKV Pulse Width	T _{CKV}	500	-	-	ns
STV Set-up Time	T _{SUV}	400	-	-	ns
STV Hold Time	T _{HDV}	400	-	-	ns
Horizontal Display Period	T _{HDP}	-	640	-	T _{CPH}
Horizontal Period Timing Range	T _{HP}	-	800	-	T _{CPH}
Horizontal Lines Per Field	T _V	520	525	640	T _{HP}
Vertical Display Timing Range	T _{DV}	-	480	-	T _{HP}



Product No.	TSR40823	REV. A

Page	17 / 35
------	---------

3.7.2 Timing Diagram

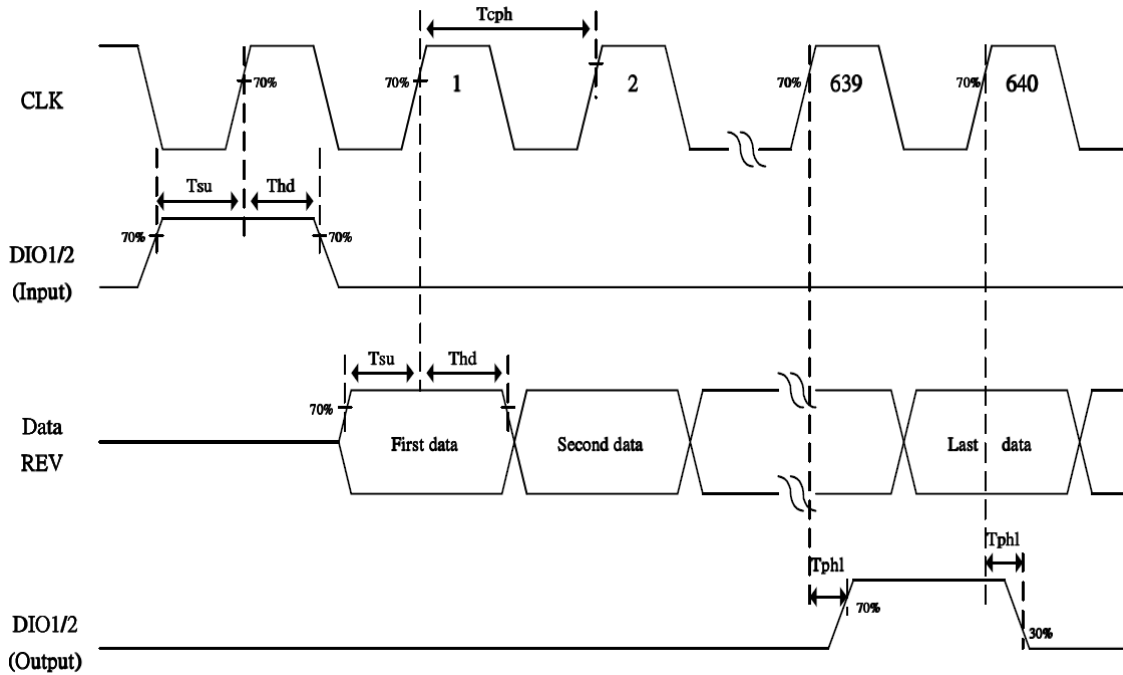


Horizontal Timing (1)

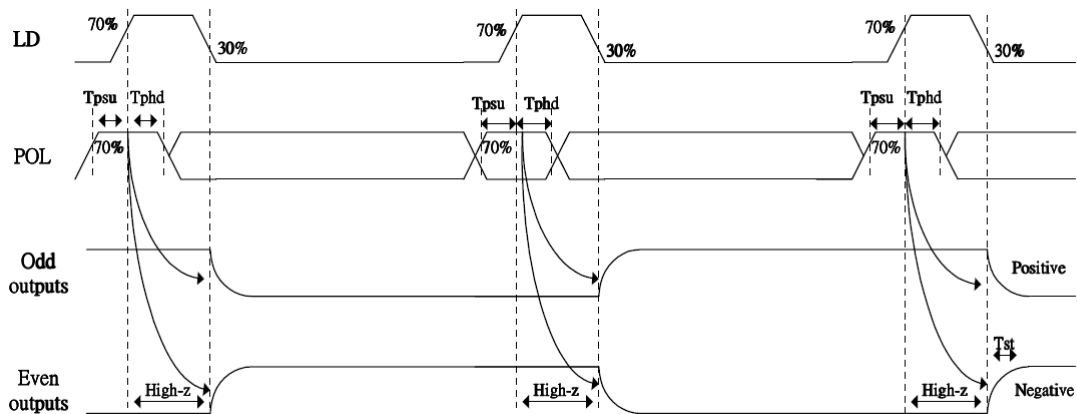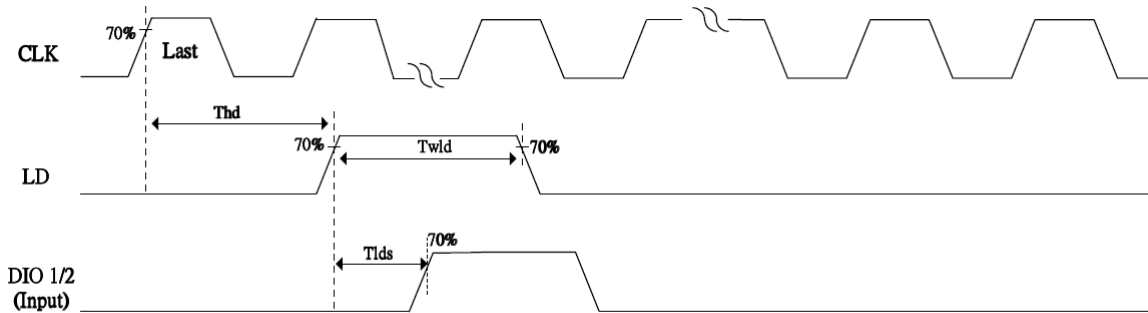


Horizontal Timing (2)

Product No.	TSR40823	REV. A
-------------	----------	--------

Page	18 / 35
------	---------

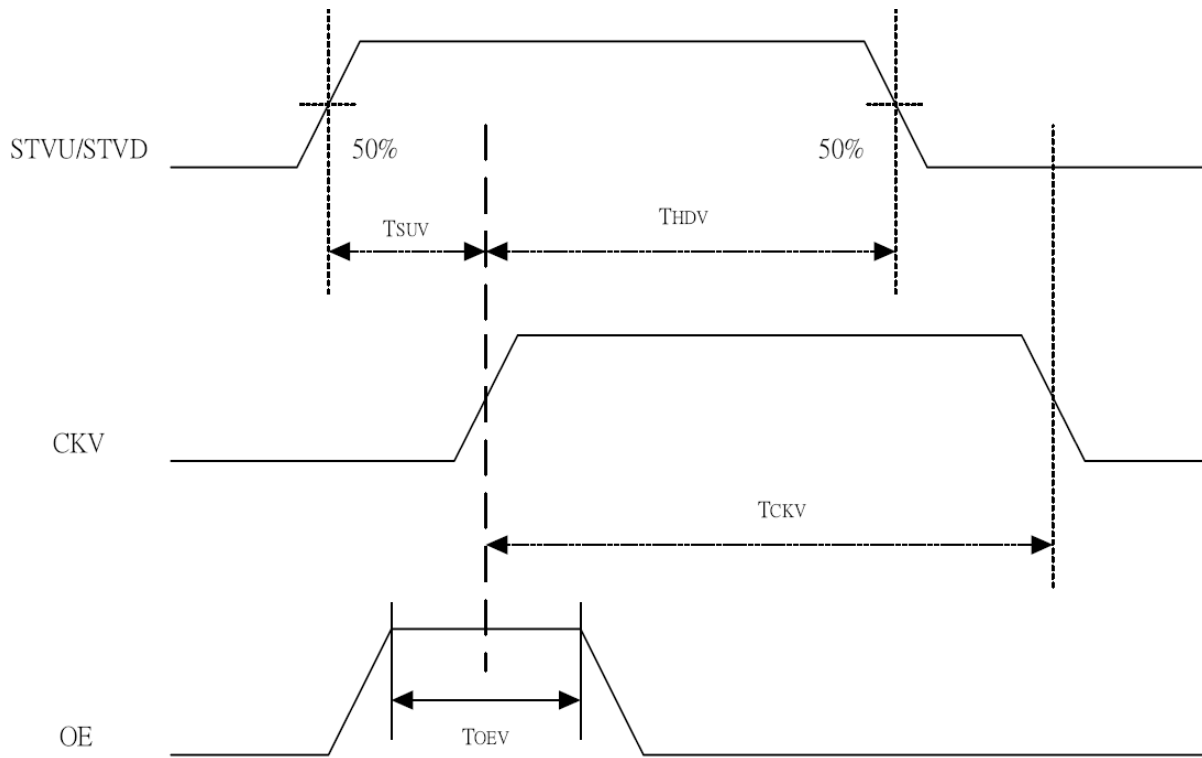

Vertical shift clock timing

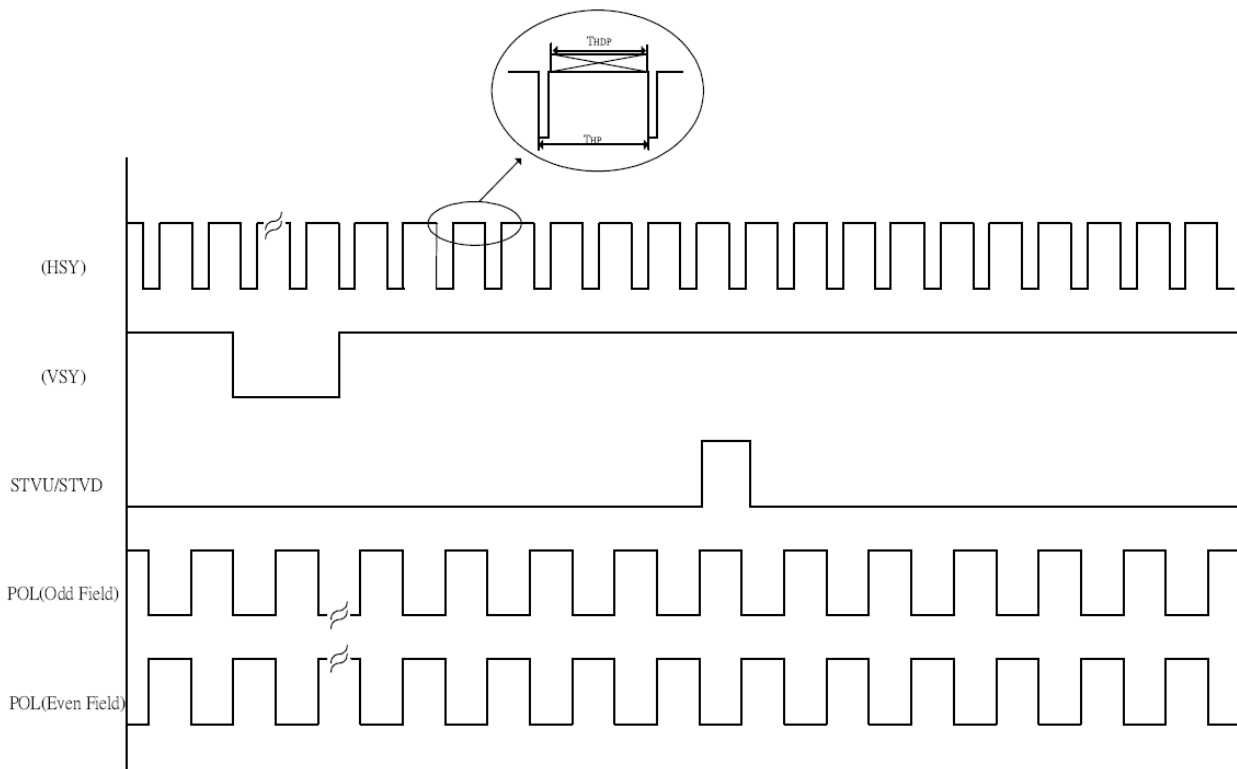


Vertical timing

Product No.	TSR40823	REV. A

Page	19 / 35
------	---------

3.8 POWER ON SEQUENCE

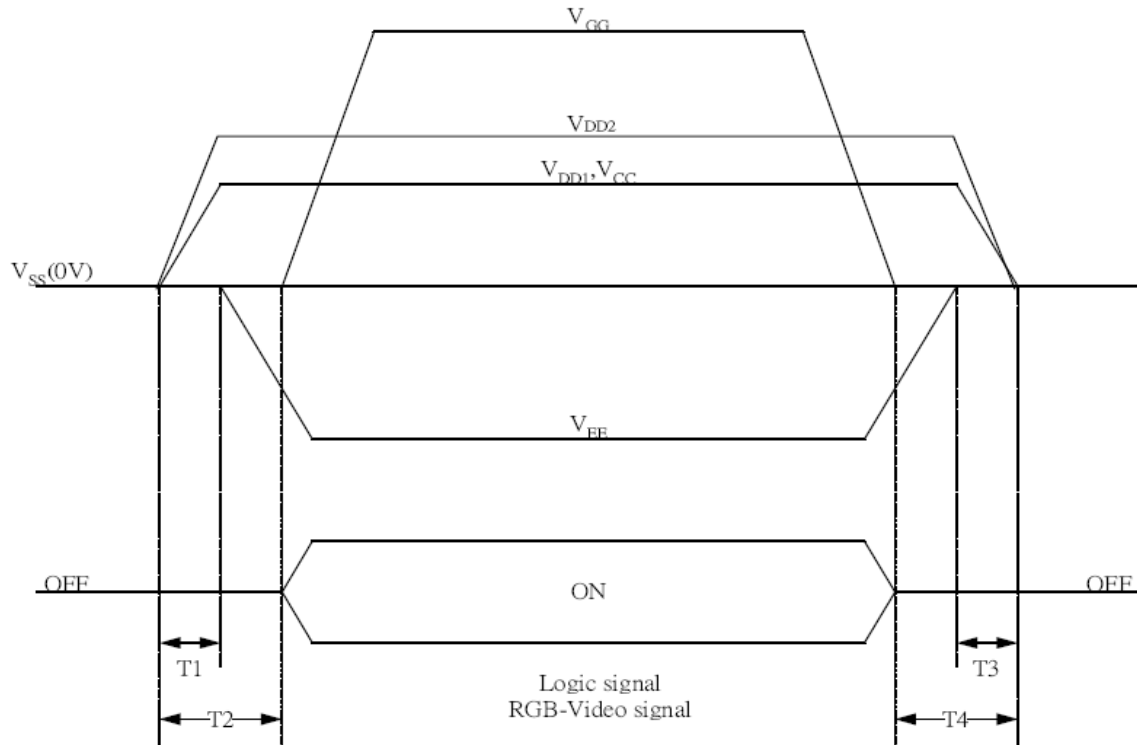

Notes:

- $10 \text{ ms} \leq T1 < T2$
- $0 \text{ ms} < T3 \leq T4 \leq 10 \text{ ms}$

Product No.	TSR40823	REV. A

Page	20 / 35
------	---------

4 OPTICAL SPECIFICATION



4.1 OPTICAL CHARACTERISTICS

Ta = 25 °C

Item	Symbol	Condition	Min	Typ	Max	Unit	Note
Viewing Angle	θ_1 (6H)	CR \geq 10	30	35	-	deg	1
	θ_2 (12H)	CR \geq 10	10	15	-	deg	1
	θ_3 (3H)	CR \geq 10	45	50	-	deg	2
	θ_4 (9H)	CR \geq 10	45	50	-	deg	2
Contrast Ratio	CR	Ta = 25 °C	200	400	-	-	3
Response Time	Tr	Ta = 25 °C; $\theta=0^\circ$	-	15	30	ms	4
	Tf		-	25	50		
Brightness	B	Ta = 25 °C; $\theta=0^\circ$	200	250	-	cd/m ²	5
Cross Talk		Ta = 25 °C; $\theta=0^\circ$	-	-	3	%	6
Viewing Direction	6 O'CLOCK						

Note 1: definition of viewing angle θ_1 & θ_2


Note 2: definition of viewing angle θ_3 & θ_4

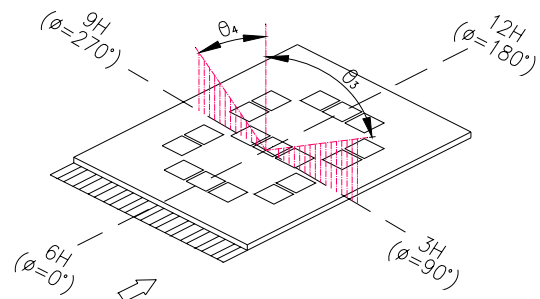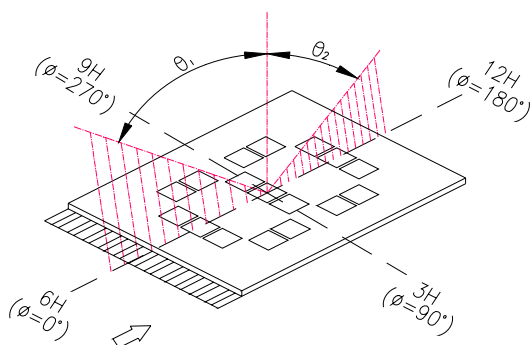


Product No.	TSR40823	REV. A

Page	21 / 35
------	---------


Note 3: definition of contrast ratio (CR)

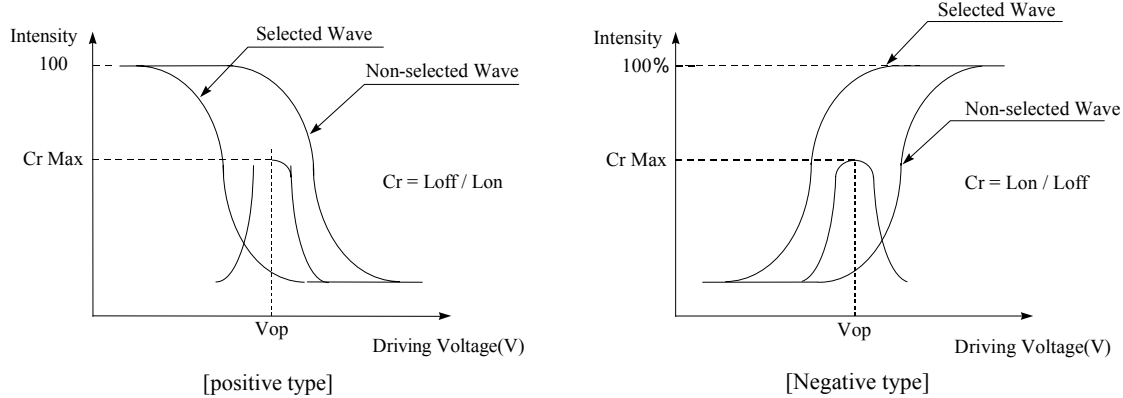

Note 4: definition of response time

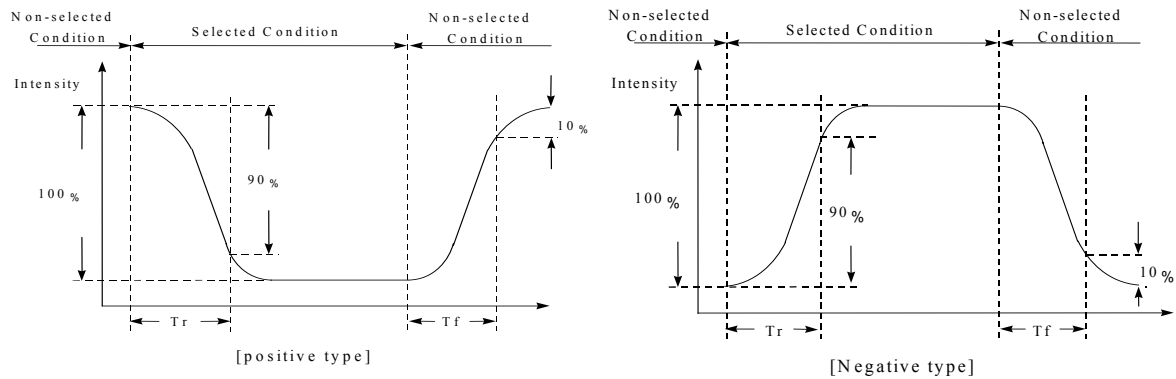


Note 5: the brightness is measured with Topcon BM-5A or BM-7 fast luminance meter. 1° field of view is used (after 1 minute operation).

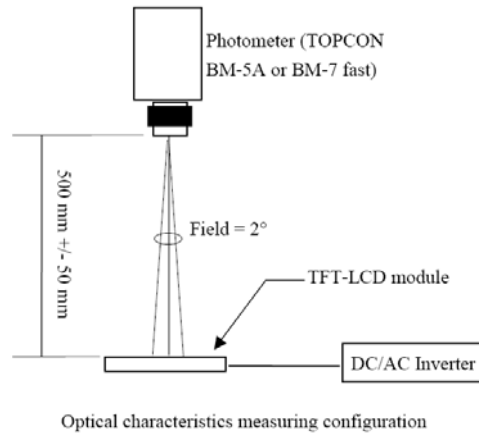

Note 6: Cross Talk = (BA-BB)/(BB) x 100

BA = Brightness of pattern A
BB = Brightness of pattern B

X = Testing point

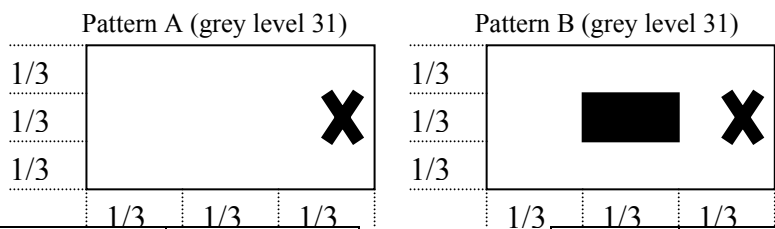

Product No.	TSR40823	REV. A

Page	22 / 35
------	---------

5 TOUCH PANEL CHARACTERISTICS

5.1 Pin Assignment

PIN	Symbol	Function
1	XL	Upper Electrode X (Left Side)
2	YU	Lower Electrode X (Upper Side)
3	XR	Upper Electrode X (Right Side)
4	YD	Lower Electrode X (Down Side)

5.2 Electrical Characteristics

Parameters	Symbol	Min	Typ	Max	Unit	Remarks
Terminal Resistance	X	120	240	370		
	Y	280	570	860		
Input Voltage	V_T		5	7	V	
Linearity(X, Y directly)				± 1.5	%	
Insulation Impedance		20			M	DC 25V
Response Time				5	ms	
Operation Force				35	g	Note 1

Note 1: Input through 0.8R stylus or finger

5.3 Durability Performance

Hitting Durability

At least 1,000,000 times with R8.0 mm silicon rubber, 200g, 3times/sec

Sliding Durability

At least 1,000,000 times with R8.0 mm polyacetal Stylus, 200g, 3times/sec

Product No.	TSR40823	REV. A

Page	23 / 35
------	---------


6 BACKLIGHT SPECIFICATION

6.1 BACKLIGHT CHARACTERISTICS



Item	Symbol	Condition	Min	Typ	Max	Unit	Note
LED Input Voltage	V_{LED}	$I_{LED} = 20$ mA	9.0	9.6	11.4	V	
LED Input Current	$I_{LED1} /$ I_{LED2}		-	20.0	-	mA	
Backlight Power consumption	P_{LED}		360	384	456	mW	4
Brightness	B	$T_a = 25$ $^{\circ}C; \theta = 0^{\circ}$	200	250	-	cd/m ²	1 (on LCD)
Brightness Uniformity		$T_a = 25$ $^{\circ}C; \theta = 0^{\circ}$	70	75		%	2
White Chromaticity	x		0.28	0.31	0.34		
	y		0.30	0.33	0.36		
Life time		$I_{LED} = 20$ mA		10000		hrs	3

Note:

1. Average luminous intensity of 9 points
2. Brightness uniformity = Min / MAX x 100
3. Half of the original brightness
4. $P_{LED} = V_{LED} \times I_{LED1} + V_{LED} \times I_{LED2}$

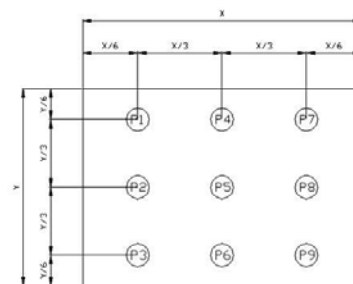


6.2 INTERNAL CIRCUIT DIAGRAM



Product No.	TSR40823	REV. A

Page	24 / 35
------	---------

6.3 LED BACKLIGHT APPLICATION NOTE

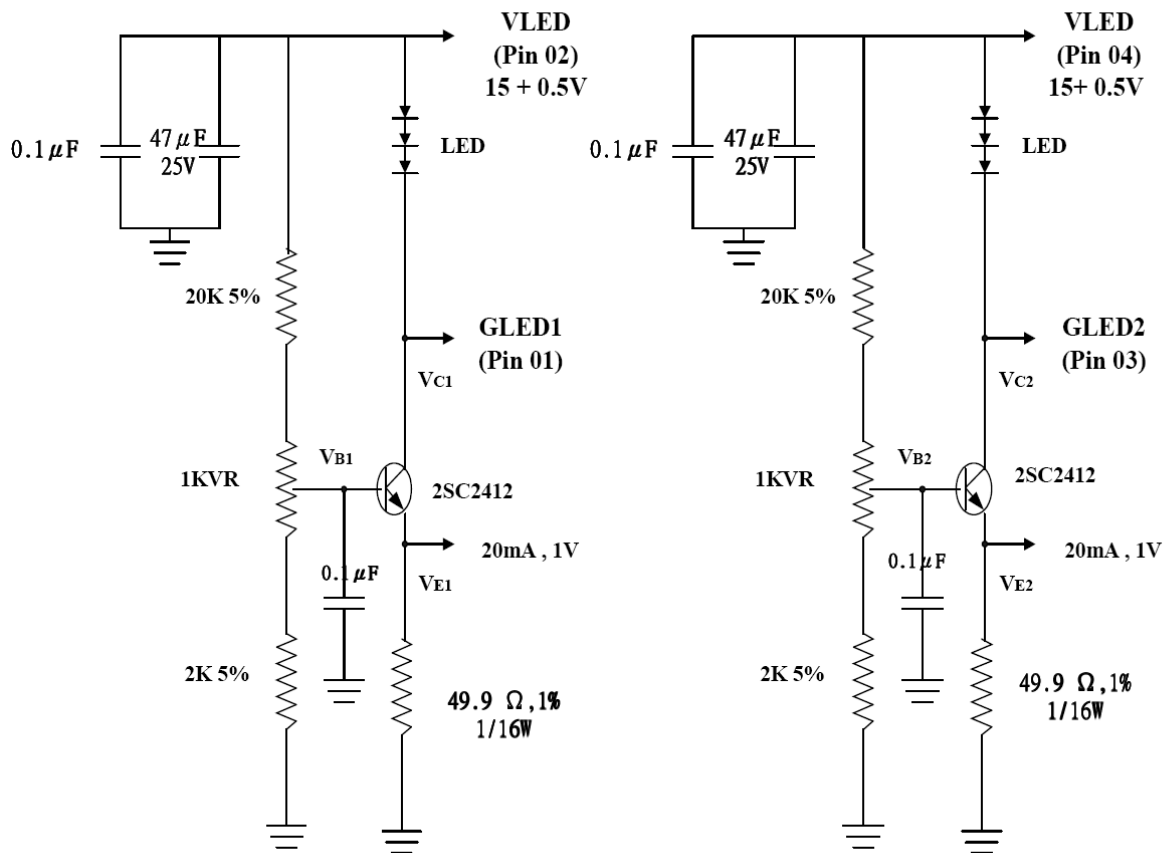

Product No.	TSR40823	REV. A

Page	25 / 35
------	---------

7 QUALITY ASSURANCE SPECIFICATION

7.1 CONFORMITY

The performance, function and reliability of the shipped products conform to the Product Specification.

7.2 DELIVERY ASSURANCE


7.2.1 Delivery inspection standards

- MIL-STD-105E, general inspection level II, single sampling level;
- IPC-AA610 rev. C, class 2 electronic assemblies standard

The quality assurance levels are shown below:

Class	AQL (%)
Critical defect	0.5%
Major defect	1.0%
Minor defect	2.5%
TOTAL	2.5%

7.2.2 Zone definition

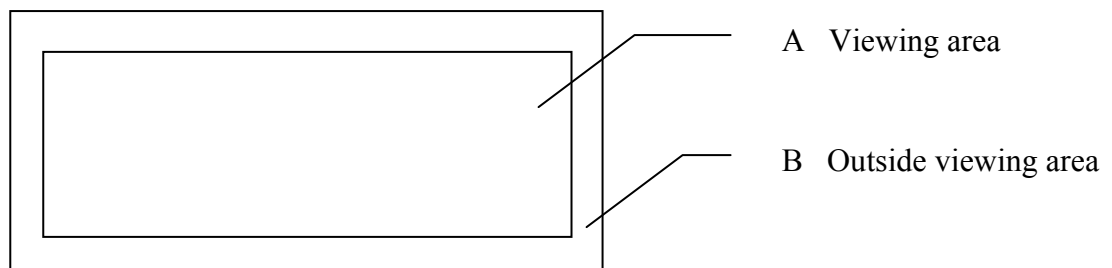


Product No.	TSR40823	REV. A

Page	26 / 35
------	---------

7.2.3 Visual inspection

- Inspect under 2x20W or 40W fluorescent lamp (approximately 3000 lux) leaving 25 to 30 cm between the module and the lamp and 30 cm between the module and the eye (measuring position).
- Appearance is inspected at the best contrast voltage (best contrast is adjusted considering clearness and crosstalk on screen).
- Inspect the module at 45° right and left, top and bottom.
- Use the optimum viewing angle during the contrast inspection.



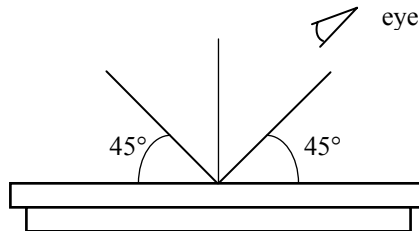


Product No.	TSR40823	REV. A

Page	27 / 35
------	---------





7.2.3.1 Standard of appearance inspection

Units: mm

Class	Item	Criteria																																				
Minor	Packing & Label	Outside & inside package Presence of product no., lot no., quantity																																				
Critical		Product must not be mixed with others and quantity must not be different from that indicated on the label																																				
Major	Dimension	Product dimensions must be according to specification and drawing																																				
Major	Electrical	Product electrical characteristics must be according to specification																																				
Critical	LCD Display	Missing lines or wrong patterns on LCD display are not allowed																																				
Minor	Black spot, white spot, dust	<p>Round type: as per following drawing $\varnothing = (X+Y)/2$</p>  <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="3">Acceptable quantity</th> </tr> <tr> <th>Size</th> <th>Zone A</th> <th>Zone B</th> </tr> </thead> <tbody> <tr> <td>$\varnothing < 0.1$</td> <td>Any number</td> <td rowspan="4">Any number</td> </tr> <tr> <td>$0.1 < \varnothing < 0.2$</td> <td>2</td> </tr> <tr> <td>$0.2 < \varnothing < 0.25$</td> <td>1</td> </tr> <tr> <td>$0.25 < \varnothing$</td> <td>0</td> </tr> </tbody> </table> <p>Line type: as per following drawing</p>  <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="4">Acceptable quantity</th> </tr> <tr> <th>Length</th> <th>Width</th> <th>Zone A</th> <th>Zone B</th> </tr> </thead> <tbody> <tr> <td>--</td> <td>$W \leq 0.02$</td> <td>Any number</td> <td rowspan="4">Any number</td> </tr> <tr> <td>$L \leq 3.0$</td> <td>$0.02 < W \leq 0.03$</td> <td>2</td> </tr> <tr> <td>$L \leq 2.5$</td> <td>$0.03 < W \leq 0.05$</td> <td></td> </tr> <tr> <td>--</td> <td>$0.05 < W$</td> <td>As round type</td> </tr> </tbody> </table> <p style="text-align: center;">Total acceptable quantity: 3</p>	Acceptable quantity			Size	Zone A	Zone B	$\varnothing < 0.1$	Any number	Any number	$0.1 < \varnothing < 0.2$	2	$0.2 < \varnothing < 0.25$	1	$0.25 < \varnothing$	0	Acceptable quantity				Length	Width	Zone A	Zone B	--	$W \leq 0.02$	Any number	Any number	$L \leq 3.0$	$0.02 < W \leq 0.03$	2	$L \leq 2.5$	$0.03 < W \leq 0.05$		--	$0.05 < W$	As round type
Acceptable quantity																																						
Size	Zone A	Zone B																																				
$\varnothing < 0.1$	Any number	Any number																																				
$0.1 < \varnothing < 0.2$	2																																					
$0.2 < \varnothing < 0.25$	1																																					
$0.25 < \varnothing$	0																																					
Acceptable quantity																																						
Length	Width	Zone A	Zone B																																			
--	$W \leq 0.02$	Any number	Any number																																			
$L \leq 3.0$	$0.02 < W \leq 0.03$	2																																				
$L \leq 2.5$	$0.03 < W \leq 0.05$																																					
--	$0.05 < W$	As round type																																				
Minor	Polariser scratch	Scratch on protective film is permitted Scratch on polariser: same as No. 1																																				
Minor	Polariser bubble	<p>$\varnothing = (X+Y)/2$</p>  <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="3">Acceptable quantity</th> </tr> <tr> <th>Size</th> <th>Zone A</th> <th>Zone B</th> </tr> </thead> <tbody> <tr> <td>$\varnothing < 0.2$</td> <td>Any number</td> <td rowspan="4">Any number</td> </tr> <tr> <td>$0.2 < \varnothing < 0.5$</td> <td>2</td> </tr> <tr> <td>$0.5 < \varnothing < 1.0$</td> <td>1</td> </tr> <tr> <td>$1.0 < \varnothing$</td> <td>0</td> </tr> </tbody> </table> <p style="text-align: center;">Total acceptable quantity: 3</p>	Acceptable quantity			Size	Zone A	Zone B	$\varnothing < 0.2$	Any number	Any number	$0.2 < \varnothing < 0.5$	2	$0.5 < \varnothing < 1.0$	1	$1.0 < \varnothing$	0																					
Acceptable quantity																																						
Size	Zone A	Zone B																																				
$\varnothing < 0.2$	Any number	Any number																																				
$0.2 < \varnothing < 0.5$	2																																					
$0.5 < \varnothing < 1.0$	1																																					
$1.0 < \varnothing$	0																																					


Product No.	TSR40823	REV. A
-------------	----------	--------

Page	28 / 35
------	---------

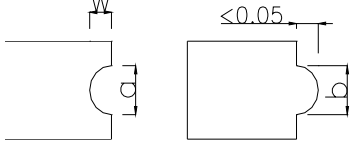Class	Item	Criteria																												
Minor	Segment deformation	<p>1.a. Pin hole on segmented display</p> <p>W: segment width $\varnothing = (A+B)/2$</p>  <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">Acceptable quantity</th> </tr> <tr> <th>Width</th> <th>\varnothing</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.4$</td> <td>$\varnothing \leq 0.2$ and $\varnothing \leq 1/2W$</td> </tr> <tr> <td>$W > 0.4$</td> <td>$\varnothing \leq 0.25$ and $\varnothing \leq 1/3W$</td> </tr> </tbody> </table> <p>Total acceptable quantity: 1 defect per segment Pin holes with \varnothing under 0.10 mm are acceptable</p>	Acceptable quantity		Width	\varnothing	$W \leq 0.4$	$\varnothing \leq 0.2$ and $\varnothing \leq 1/2W$	$W > 0.4$	$\varnothing \leq 0.25$ and $\varnothing \leq 1/3W$																				
Acceptable quantity																														
Width	\varnothing																													
$W \leq 0.4$	$\varnothing \leq 0.2$ and $\varnothing \leq 1/2W$																													
$W > 0.4$	$\varnothing \leq 0.25$ and $\varnothing \leq 1/3W$																													
Minor	Segment deformation	<p>1b. Pin hole on dot matrix display</p>  <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">Acceptable quantity</th> </tr> <tr> <th>Size</th> <th></th> </tr> </thead> <tbody> <tr> <td>$a, b < 0.1$</td> <td>Any number</td> </tr> <tr> <td>$(a+b)/2 \leq 0.1$</td> <td>Any number</td> </tr> <tr> <td>$0.5 < \varnothing < 1.0$</td> <td>3</td> </tr> </tbody> </table> <p>Total acceptable quantity: 7</p> <p>2. Segments / dots with different width</p>  <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">Acceptable</th> </tr> </thead> <tbody> <tr> <td>$a \geq b$</td> <td>$a/b \leq 4/3$</td> </tr> <tr> <td>$a < b$</td> <td>$a/b > 4/3$</td> </tr> </tbody> </table> <p>3. Alignment layer defect $\varnothing = (a+b)/2$</p>  <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">Acceptable quantity</th> </tr> <tr> <th>Size</th> <th></th> </tr> </thead> <tbody> <tr> <td>$\varnothing \leq 0.4$</td> <td>Any number</td> </tr> <tr> <td>$0.4 < \varnothing \leq 1.0$</td> <td>5</td> </tr> <tr> <td>$1.0 < \varnothing \leq 1.5$</td> <td>3</td> </tr> <tr> <td>$1.5 < \varnothing \leq 2.0$</td> <td>2</td> </tr> </tbody> </table> <p>Total acceptable quantity: 7</p>	Acceptable quantity		Size		$a, b < 0.1$	Any number	$(a+b)/2 \leq 0.1$	Any number	$0.5 < \varnothing < 1.0$	3	Acceptable		$a \geq b$	$a/b \leq 4/3$	$a < b$	$a/b > 4/3$	Acceptable quantity		Size		$\varnothing \leq 0.4$	Any number	$0.4 < \varnothing \leq 1.0$	5	$1.0 < \varnothing \leq 1.5$	3	$1.5 < \varnothing \leq 2.0$	2
Acceptable quantity																														
Size																														
$a, b < 0.1$	Any number																													
$(a+b)/2 \leq 0.1$	Any number																													
$0.5 < \varnothing < 1.0$	3																													
Acceptable																														
$a \geq b$	$a/b \leq 4/3$																													
$a < b$	$a/b > 4/3$																													
Acceptable quantity																														
Size																														
$\varnothing \leq 0.4$	Any number																													
$0.4 < \varnothing \leq 1.0$	5																													
$1.0 < \varnothing \leq 1.5$	3																													
$1.5 < \varnothing \leq 2.0$	2																													
Minor	Colour uniformity	Level of sample for approval set as limit sample																												
Critical	Backlight	The backlight colour should correspond to the product specification																												
Critical		Flashing and or unlit backlight is not allowed																												
Minor		Dust larger than 0.25 mm is not allowed																												
Major	COB	Exposed wire bond pad is not allowed																												
Major		Insufficient covering with resin is not allowed (wire bond line exposed)																												
Minor		Dust or bubble on the resin are not allowed																												

Product No.	TSR40823	REV. A

Page	29 / 35
------	---------

Class	Item	Criteria													
Major	PCB 	No unmelted solder paste should be present on PCB													
Critical		Cold solder joints, missing solder connections, or oxidation are not allowed													
Minor		No residue or solder balls on PCB are allowed													
Critical		Short circuits on components are not allowed													
Minor	Tray particles	<table border="1"> <thead> <tr> <th></th> <th>Size</th> <th>Quantity</th> </tr> </thead> <tbody> <tr> <td rowspan="2">On tray</td> <td>$\varnothing < 0.2$</td> <td>Any number</td> </tr> <tr> <td>$\varnothing > 0.25$</td> <td>4</td> </tr> <tr> <td rowspan="2">On display</td> <td>$\varnothing \geq 0.25$</td> <td>2</td> </tr> <tr> <td>$L = 3$</td> <td>1</td> </tr> </tbody> </table>		Size	Quantity	On tray	$\varnothing < 0.2$	Any number	$\varnothing > 0.25$	4	On display	$\varnothing \geq 0.25$	2	$L = 3$	1
	Size	Quantity													
On tray	$\varnothing < 0.2$	Any number													
	$\varnothing > 0.25$	4													
On display	$\varnothing \geq 0.25$	2													
	$L = 3$	1													

Product No.	TSR40823	REV. A

Page	30 / 35
------	---------

7.3 DEALING WITH CUSTOMER COMPLAINTS

7.3.1 Non-conforming analysis

Purchaser should supply Densitron with detailed data of non-conforming sample.

After accepting it, Densitron should complete the analysis in two weeks from receiving the sample.

If the analysis cannot be completed on time, Densitron must inform the purchaser.

7.3.2 Handling of non-conforming displays

If any non-conforming displays are found during customer acceptance inspection which Densitron is clearly responsible for, return them to Densitron.

Both Densitron and customer should analyse the reason and discuss the handling of non-conforming displays when the reason is not clear.

Equally, both sides should discuss and come to agreement for issues pertaining to modification of Densitron quality assurance standard.

Product No.	TSR40823	REV. A

Page	31 / 35
------	---------

8 RELIABILITY SPECIFICATION

8.1 RELIABILITY TESTS

Test Item	Test Condition	Evaluation and assessment
High Temperature Operation	70°C for 240 hours	No abnormalities in function* and appearance
Low Temperature Operation	-20°C for 240 hours	No abnormalities in function* and appearance
High Temperature Storage	70°C for 240 hours	No abnormalities in function* and appearance
Low Temperature Storage	-20°C for 240 hours	No abnormalities in function* and appearance
High Temperature & High Humidity Storage	60°C, 90%RH for 240 hours	No abnormalities in function* and appearance
Thermal Shock Storage	-20°C to 70 °C for 200 cycles, left at each temperature for 30 min	No abnormalities in function* and appearance
Vibration (storage)	Sweep for 11 min at 10~55Hz, amplitude 1.0 mm, 6 cycles each in the X, Y and Z direction	No abnormalities in function* and appearance
ESD	200pF, 0Ω, ±200V, 1 time each terminal	No abnormalities in function* and appearance
Shock	100G, 6ms, 3 times each in the X, Y and Z direction	No abnormalities in function* and appearance
Electrostatic Discharge test (non operation)	200pF, 0Ω ±200V 1 time/each terminal	
Hitting Durability	At least 1,000,000 times with R8.0 mm silicon rubber, 200g, 3times/sec	
Sliding Durability	At least 1,000,000 times with R8.0 mm polyacetal Stylus, 200g, 3times/sec	

* Current consumption < 2 times initial value

* Contrast > ½ initial value

Product No.	TSR40823	REV. A

Page	32 / 35
------	---------

8.2 LIFE TIME

Item	Description
1	Function, performance, appearance, etc. shall be free from remarkable deterioration within 50,000 hours under ordinary operating and storage conditions of room temperature (25 ± 10 °C), normal humidity ($45 \pm 20\%$ RH), and in area not exposed to direct sunlight.
2	Function, performance, appearance, etc. shall be free from remarkable deterioration within 5,000 hours under ordinary operating and storage conditions of 70 °C temperature, normal humidity ($45 \pm 20\%$ RH), and in area not exposed to direct sunlight.

Product No.	TSR40823	REV. A

Page	33 / 35
------	---------

9 PART NUMBER DESCRIPTIONS FOR AVAILABLE OPTIONS

TSR40823①②480G640③④

- ① **POLARIZER TYPE**
E = Transmissive
- ② **BACKLIGHT COLOUR**
W = White
- ③ **FLUID TYPE AND TEMPERATURE RANGE**
H = Wide Temperature Range; negative supply voltage required
- ④ **FLUID TYPE AND TEMPERATURE COMPENSATION**
R = TFT

Product No.	TSR40823	REV. A

Page	34 / 35
------	---------

10 HANDLING PRECAUTIONS

Safety

If the LCD panel breaks, be careful not to get the liquid crystal fluid in your mouth or in your eyes. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and plenty of water.

Mounting and Design

Place a transparent plate (e.g. acrylic, polycarbonate or glass) on the display surface to protect the display from external pressure. Leave a small gap between the transparent plate and the display surface.

When assembling with a zebra connector, clean the surface of the pads with alcohol and keep the surrounding air very clean.

Design the system so that no input signal is given unless the power supply voltage is applied.

Caution during LCD cleaning

Lightly wipe the display surface with a soft cloth soaked with Isopropyl alcohol, Ethyl alcohol or Trichlorotrifluoroethane.

Do not wipe the display surface with dry or hard materials that will damage the polariser surface.

Do not use aromatic solvents (toluene and xylene), or ketonic solvents (ketone and acetone).

Caution against static charge

As the display uses C-MOS LSI drivers, connect any unused input terminal to VDD or VSS. Do not input any signals before power is turned on.

Also, ground your body, work/assembly table and assembly equipment to protect against static electricity.

Packaging

Displays use LCD elements, and must be treated as such. Avoid strong shock and drop from a height. To prevent displays from degradation, do not operate or store them exposed directly to sunshine or high temperature/humidity.

Caution during operation

It is indispensable to drive the display within the specified voltage limit since excessive voltage shortens its life.

Direct current causes an electrochemical reaction with remarkable deterioration of the display quality.

Give careful consideration to prevent direct current during ON/OFF timing and during operation.

Response time is extremely delayed at temperatures lower than the operating temperature range while, at high temperatures, displays become dark. However, this phenomenon is reversible and does not mean a malfunction or a display that has been permanently damaged.

If the display area is pushed on hard during operation, some graphics will be abnormally displayed but returns to a normal condition after turning off the display once.

Even a small amount of condensation on the contact pads (terminals) can cause an electro-chemical reaction which causes missing rows and columns. Give careful attention to avoid condensation.

Storage

Store the display in a dark place where the temperature is $25^{\circ}\text{C} \pm 10^{\circ}\text{C}$ and the humidity below 50%RH.

Store the display in a clean environment, free from dust, organic solvents and corrosive gases.

Do not crash, shake or jolt the display (including accessories).

Product No.	TSR40823	REV. A

Page	35 / 35
------	---------